

7" hands-free monitor ART 7/G+

Reference: ART 7/G+

Product code: 12310701

EAN code: 8429898020327



Main characteristics

- TCP/IP protocol "G+" digital installation.
- Housing made of white ABS plastic.
- 7" touch screen.
- Hands-free monitor for surface installation.
- High efficiency speakers.

Dimensions: 222(W) x 154(H) x 15(D) mm.

Additional information

- Virtual keyboard for call dialing.
- Outdoor panel tracking function.
- Image memory for up to 100 photos (internal storage).
- Automatic image deletion function after 30 days.
- Personalization of background color and ringtones.
- Monitoring of CCTV cameras with ONVIF protocol (up to 32).
- 12Vdc alarm output.
- 4 zones alarm input: PIR, gas sensor, fire...
- Connection via RJ-45 connector.

Accessories

- MAC-M3-UNI replacement frame
- SOB-UNI table stand
- MAC-M3-GB2/A replacement frame
- HRF-12/1,25A local power supply for monitors G+

Visit in the website: <https://www.golmar.es/products/7-hands-free-monitor-art-7-g>

Description

Art 7/G+ video monitor, is a TCP/IP solution device, for the communication in luxury homes, residential buildings, condominiums or office buildings.

Thanks to its technology and Peer2Peer facilities Art 7/G+ monitors do not require any server on the installation. The protocol of communication is TCP/IP which makes possible to be connected to a LAN together with other IP devices in the same installation.

The system never becomes busy thanks to the multi-channel feature. The touch capacitive screen displaying big icons makes it user-friendly, specially for elderly or disabled people.

Features

- Missed calls image memory: 100 pics.
- Text messages between apartments.
- Intercommunication between apartments.
- Short-cut list of intercom apartments.
- Selective call to concierge stations.
- Self-activation of door entry panels.
- Voice mail-box service.
- Communication and ring tone adjustments.
- Track up to 32 ONVIF Cameras.
- Door Bell input tone. Dry contact integrated.
- Output for call signal repeat.
- 4 Alarm zones inputs. Alarms reported to guard.
- 12Vdc alarm output.
- Emergency texts from guard units.
- Connector RJ-45 fast and secure installation.
- 18Vdc PoE.

Technical details

Resolution: 800 x 480 px.
Video coding: H.264.
Operative system: Linux.
Power consumption: max. 8W.
Working temperature: -10° to 55°
Humidity: 10% - 90% non condensing.
Voltage: 18Vdc PoE. Requires specific switches.
Construction: ABS plastic.
Touch screen: Full capacitive.

Options


SOB-M

Desktop adaptor



Dimensions: 222(W) 154 (H) 20 (D) mm

Diagram

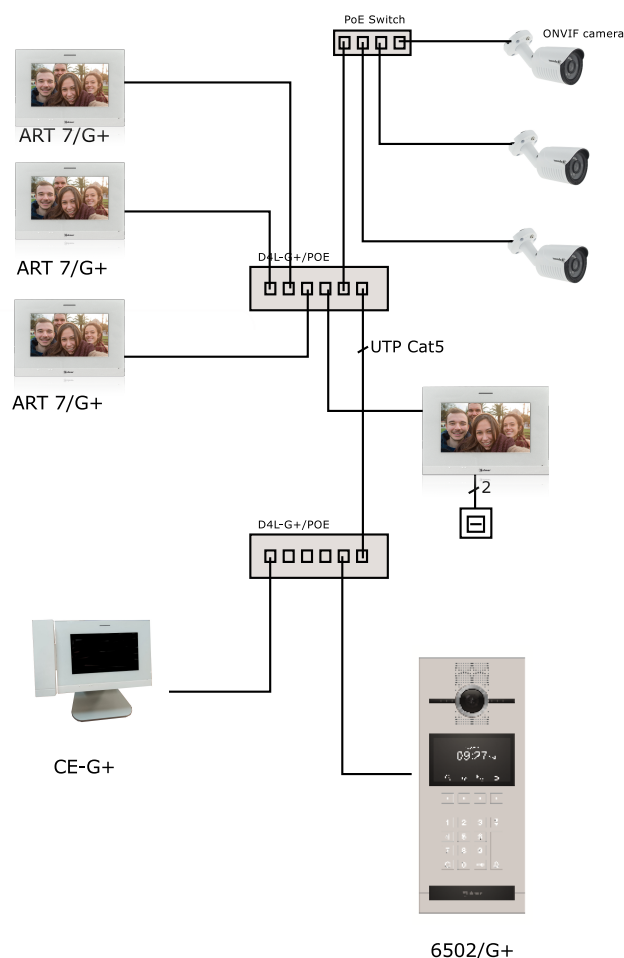

For further information download the instructions manual.

Due to continuous product improvement, all colors, sizes, materials, finishes and specifications are subject to change without notice.